







DUO



Standard version shown



- > Opening angles: 75°, 90°, 110°
- > Unhanded design
- > For use with wooden lids or lids with aluminium frames, also suitable for use as flap stay
- > For flaps with aluminium frame width 20 or from 45 mm
- > With braking and locking mechanisms, can be adjusted using an SW4 hex key
- > Self closing function
- > Clip-mounting on pre-mounted screw fixing brackets, no tools required
- > Height ± 2 mm, side $+3/-1$ mm, tilt ± 1.5 mm and pull adjustment facility
- > Steel bracket, zinc alloy lid stay in nickel-plated, black or white

Duo flap/lid stay

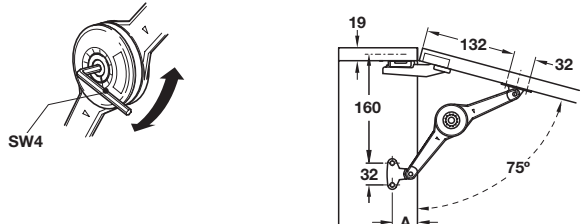


For edge distance 37 mm (A)


For edge distance 28 mm (A)




Note: When used as a flap stay, a magnet has to be fitted with an installation height of $189 + 32$ mm and an outreach of $160 + 32$ mm



Mounting bracket for fixing to flaps made of wood



Mounting bracket for fixing to aluminium frames



Screw-on bracket for fixing to lateral panel

- > Light version - min. installation depth 130 mm
- > Order fixing screws separately
- > Order qty: 1 pc

Flap height (mm)	Maximum flap weight (kg)			
	Function locking		Function braking	
Installation as lid stay				
For opening angle 75°	1 stay	2 stays	1 stay	2 stays
200	9.0	15.0	11.5	15.0
250	7.0	15.0	9.0	15.0
300	6.0	12.0	7.5	15.0
350	5.0	10.0	6.5	13.0
400	4.5	9.0	6.0	11.5
450	4.0	8.0	5.0	10.0
500	3.5	7.0	4.5	9.0
For opening angle 90°	1 stay	2 stays	1 stay	2 stays
200	7.5	15.0	9.5	15.0
250	6.0	12.0	7.5	15.0
300	5.0	10.0	6.0	13.0
350	4.0	8.5	5.5	11.0
400	3.5	7.0	5.0	10.0
450	3.5	6.5	4.0	8.5
500	3.0	6.0	4.0	8.0
For opening angle 110°	1 stay	2 stays	1 stay	2 stays
200	6.0	12.0	8.0	15.0
250	5.0	9.5	6.0	12.0
300	4.0	8.0	5.0	10.0
350	3.0	7.0	4.0	9.0
400	3.0	6.0	4.0	7.5
450	2.5	5.0	3.5	7.0
500	2.0	5.0	3.0	6.0
Installation as flap stay (use 2 fittings)				
For opening angle 90°	2 stays		2 stays	
200	15.0		15.0	
250	12.0		15.0	
300	10.0		13.0	
350	8.5		113.0	
400	7.0		10.0	



For wooden lids/lids with aluminium frame, frame width from 45 mm

Distance from edge Nickel-plated White

For Hospa screws

28 mm 373.66.611 -
37 mm 373.66.612 373.66.262

For Varianta screws

37 mm 373.66.614 373.66.264