Metal non-fire rated access panels – picture frame

Lightweight non-fire rated metal access panels for access to mechanical, electrical and other building services.



How to order

• State which size of panel is required and confirm the hole cutting size

Bill of quantity

L20 Doors/Shutters/Hatches

- Clause 630[^] HATCHES
 - Manufacturer: Timloc Building Products, Timloc House, Ozone Park, Howden, East Yorkshire, DN14 7SD. Tel: 01405 765567,
 - Fax: 01405 720479. Web: <u>www.timloc.co.uk</u>
 - Product Reference: Timloc Access Panels
 Type: Timloc Metal (Non Fire Rated) Access Panels Picture Framed
 - Product Code: APB300x300NFR (see other product codes/variation of sizes)
 - Frame Fitting Size: **305 x 305mm** (see other product codes/variation of sizes)


NSSPlus

- Application: Wall, Ceiling or Voids
- Frame Type: Picture
 Colour: White RAL 9016 Smooth Polyester Powder Coating

Products in the range

Metal non-fire rated access panels with picture frame

Frame fitting size	Clear opening size	Overall panel and frame dimension	Door and lock type	Product code
155 x 155mm	145 x 145mm	185 x 185mm	Hinged with twist lock	APB150x150NFR
205 x 205mm	195 x 195mm	235 x 235mm	Hinged with twist lock	APB200x200NFR
305 x 305mm	295 x 295mm	335 x 335mm	Hinged with twist lock	APB300x300NFR
455 x 455mm	425 x 425mm	485 x 485mm	Hinged with twist lock	APB450x450NFR
555 x 555mm	525 x 525mm	585 x 585mm	Hinged with twist lock	APB550x550NFR
605 x 605mm	575 x 575mm	635 x 635mm	Hinged with twist lock	APB600x600NFR

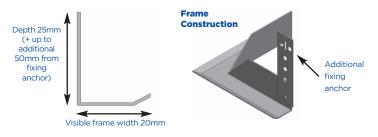

Use

- Provides access to services and connections behind dry lined walls, ducts and ceilings
- For applications where plastic access panels are not suitable and a fire rating is not required
- Ideal solution for meeting Part J and the gas safety industry's concealed boiler flue inspection access requirements (non-fire rated applications)

Features and benefits

- Purpose made product saves time and money compared with traditional joiner-made access doors
- Excellent aesthetic appearance and finish
- Flush fitting door panels
- Visible picture frame surround smartly conceals cut out edges and contributes to a faster installation
- · Smooth and enduring polyester powder coated finish
- Allows for painting if required
- Quick and straight forward to install
- Universal door handing
- Supplied with additional fixing anchors (+50mm) for deeper wall and ceiling installations
- Hinged door panel with twist lock mechanism (screwdriver operated)
- Quick release door panel mechanism fully removes to the door for maximum access
- Acoustic performance of 24dB (contact the Timloc Technical team for more information)

Quality

- Manufactured to BS EN ISO 9001 and BS EN ISO 14001
- Helps to meet Building Regulation Document Part J Concealed Flues in Voids (2010 edition)

Material and colour choice

- Electro galvanised mild steel
- Polyester powder coated smooth finish 20% gloss
- White RAL 9016

Installation advice

• Please contact the Timloc Technical team

Care and maintenance

- Clean using a soft cloth with a mild detergent
- Spare keys available upon request