




G7000 Euro-Profile Cylinder Mortise Sashlock

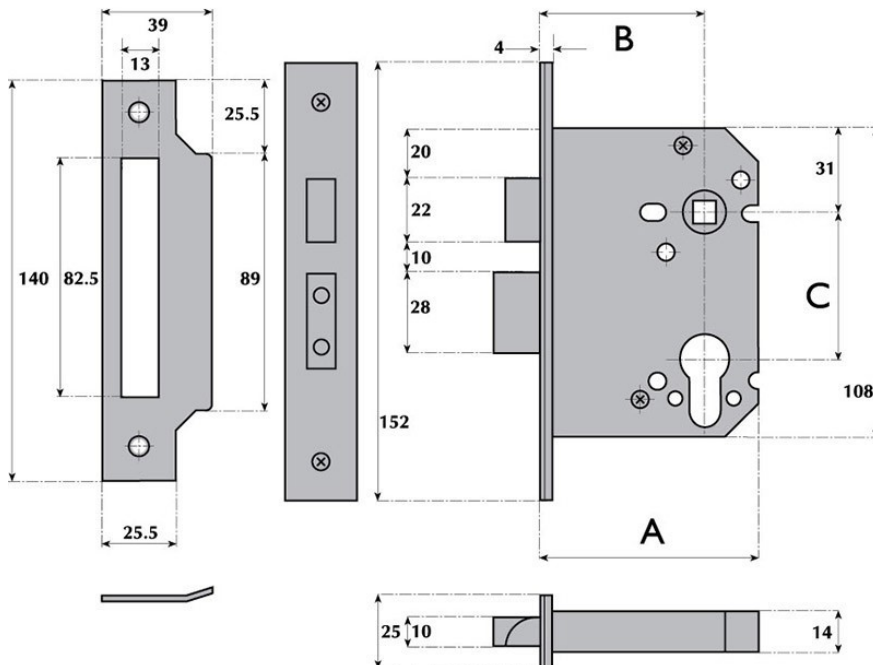


Description Euro profile cylinder mortise sashlock for use on external wooden hinged doors providing a high level of security. CE Marked door lock Fire rated to BS EN 1634-1:2000 & Performance rated to BS EN 12209. Latchbolt operated by lever handle from either side. Deadbolt operated by key from either side using a double cylinder or by key outside and thumb turn inside using a single cylinder with turn. Supplied with striker plate and fixing screws. Finishes stainless steel (SS) or satin brass (SB). Other finishes available.

Operation Latchbolt operated by lever handle from either side. Deadbolt operated by key from either side using a double cylinder or by key outside and thumb turn inside using a single cylinder with turn

Case

Pierced to accept 20mm and 38mm centre bolt through fixing escutcheons.
76mm and 101mm sizes pierced to accept 38mm centre horizontally and diagonally opposed bolt through fixing furniture 63mm size pierced diagonally only

| | |
|-----------------------------|--|
| Striker Plate | Type A |
| Latchbolt | Brass, reversible. Projection 12mm |
| Deadbolt | Brass, with two hardened steel rollers. Throw 14mm |
| Follower | Brass, to suit 8mm square spindle. One-way action. Sprung to suit sprung lever handle furniture For unsprung lever handle furniture heavy duty springing should be specified |
| Cylinder | Not supplied. May be used with the following cylinders: a) Key either side such as Guardian G9001 b) Turn inside and key outside such as Guardian G9002 |
| Rebate Units To Suit | G3051-13mm G3052-19mm G3053-25mm |
| A Lock Case | 63mm, 76mm, 101mm |
| B Backset | 45mm, 57mm, 82mm |
| C Centres | 51mm, 51mm, 51mm |

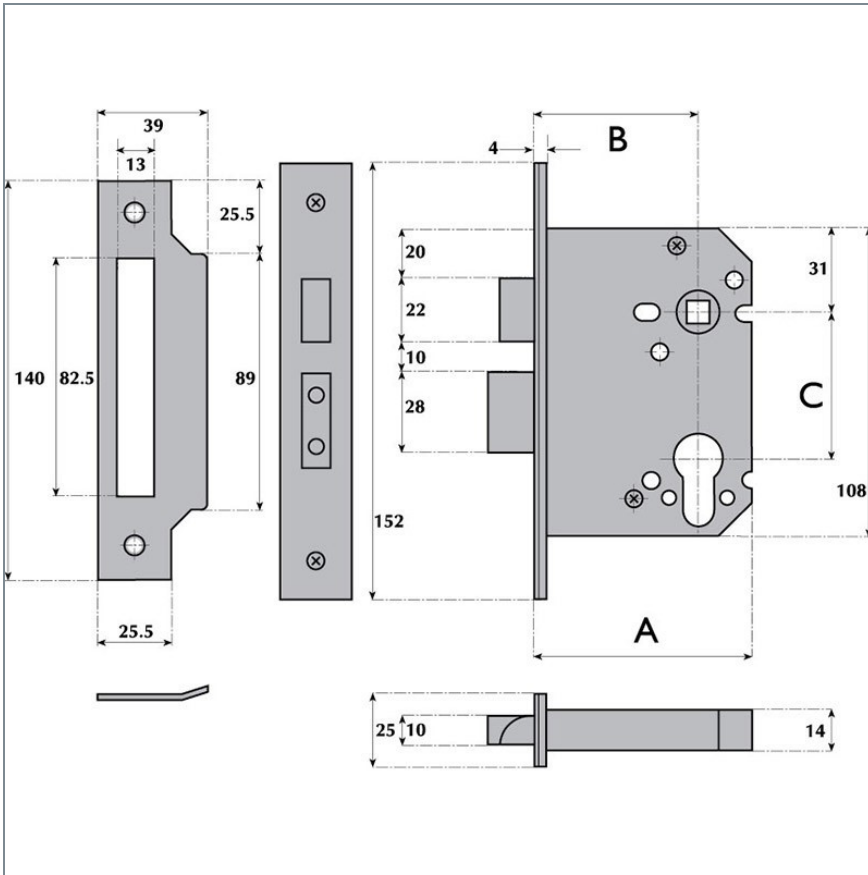

Guardian Lock & Engineering Co Ltd. Imperial Works, Wednesfield Road, Willenhall, West Midlands, WV13 1AL, United Kingdom.

+44(0)1902 635 964 | sales@imperiallocks.co.uk