



The PISBMAXI is a heavy duty elevated post base to suit various sizes of timber and Glulam posts.



[ETA-07/0285](#), [UK-DoP-e07/0285](#)

FEATURES



Material

Material Grade


S235

Finish

Post hot dip galvanised.

Benefits

- The post base is made of 15mm thick plates welded to a Ø70mm tube.
- The column is fixed to an 8mm thick vertical plate with holes to suit Ø12mm dowels.

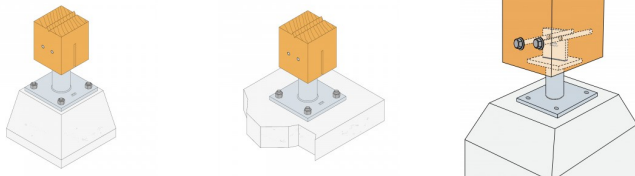

APPLICATIONS

Suitable On



Timber / Glulam columns to solid foundations

Scope

The PISBMAXI is a heavy duty elevated post base to suit various sizes of timber and Glulam posts.




TECHNICAL DATA

Product Dimensions



References	Product Dimensions [mm]										Top plate holes	Bottom plate holes
	A	B	C	D	E	F	G	H	t ₁	t ₂	Ø13	Ø17
PISBMAXIG-K	120	120	105	200	200	148	70	90	8	15	2	4

Simplified Characteristic Capacities - Timber to Concrete

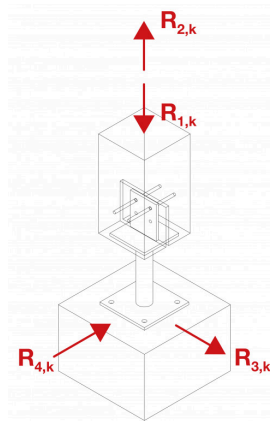

References	Number of Fasteners				R _{1,k} **	Simplified characteristic capacities - Timber C24 [kN]								
	On post		On concrete			R _{2,k}			R _{3,k} **			R _{4,k}		
	Qty	Type	Qty	Type		Dowel length [mm]			Dowel length [mm]			Dowel length [mm]		
						120	140	160	120	140	160	120	140	160
PISBMAXIG-K	2	Ø12	4	Ø16*	272.2	34.5	38.5	42.1	22.5	20.1	20.1	7.7	9.9	12.3

* Refer to the Simpson Strong-Tie anchor product range for suitable anchors. Typical anchor solutions are SET-XP and AT-HP, depending on the concrete type, spacing and edge distances.


** The published characteristic capacity is based on medium term load duration and service class 3 according to EC5 (EN 1995). For other load duration and service class, please refer to the ETA to get more accurate capacities

INSTALLATION

Fixing

Attach the PISBMAXI post base i to the concrete foundation using concrete screws / mechanical anchors or chemical anchor system.

Connect to the timber using dowels Ø12 supplied.



Befestigung
eines
PISBMAXI
G-B auf
Betonuntergrund

