


# G7088 Dual-profile cylinder mortice night latch with anti-thrust bolt

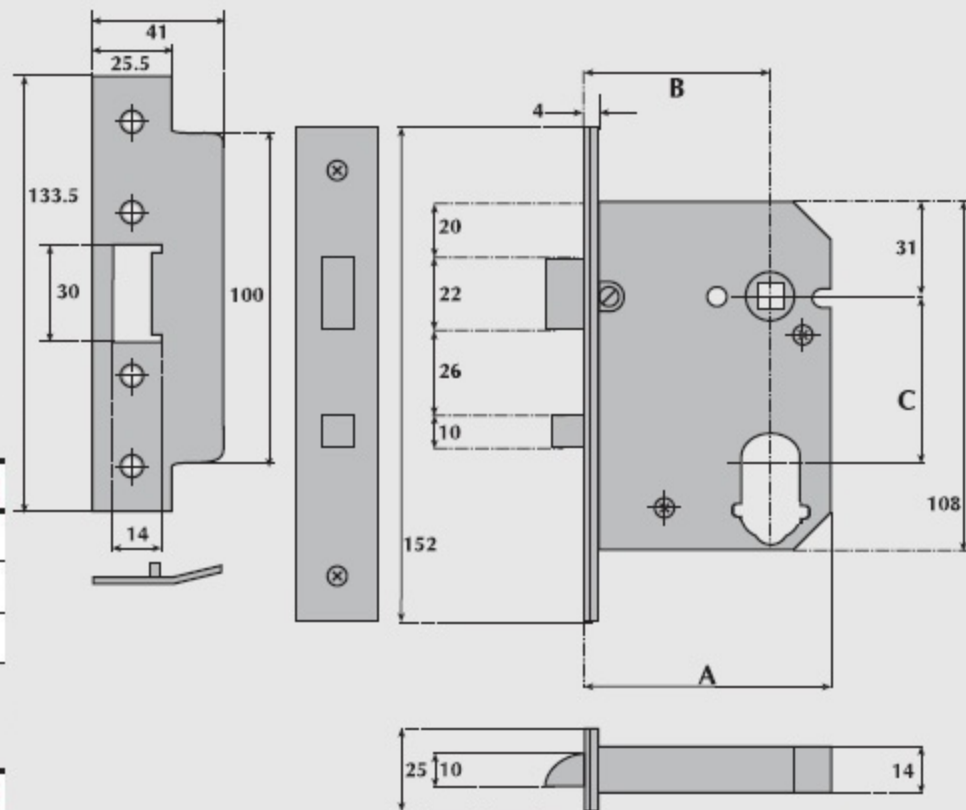

For Euro-Profile Cylinders

A Lockcase	B Backset	C Centres
63mm	45mm	49.5mm
76mm	57mm	49.5mm
101mm	82mm	49.5mm

For Oval-Profile Cylinders

A Lockcase	B Backset	C Centres
63mm	45mm	50mm
76mm	57mm	50mm
101mm	82mm	50mm

## OPERATION:

Latchbolt operated by key from outside and lever handle or turn knob inside using a single cylinder or by key from either side using a double cylinder.

When the door is shut the bolt is locked against end pressure.

The bolt may be held in the withdrawn position by means of a reverse turn of the key. Use with turn operated cylinders is not recommended.

## SPECIFICATION:

### CASE.

Pierced to accept 38mm centre horizontally opposed bolt through fixing furniture. Pierced to accept 20mm centre bolt through fixing escutcheons.

### STRIKE PLATE.

Type W.

### LATCHBOLT.

Brass, reversible. Projection 12mm.

### ANTI-THRUST SLIDE.

SCP, effective at door gaps up to 6mm.

### FOLLOWER.

Brass, to suit 8mm square spindle. One-way action. Sprung to suit sprung lever handle furniture only.

### CYLINDER.

Not supplied. May be used with the following cylinders:  
 a) Key outside such as Guardian G9000 or G9010  
 b) Key either side such as Guardian G9001 or G9011.

### REBATE UNITS

### TO SUIT:

G3073-13mm G3074-19mm G3075-25mm (Handed).