

G5050 BS3621 British Standard 5 Lever Mortice Sashlock



















Description

Kitemarked BS3621 British standard 5 Lever mortice sashlock for use on external wooden hinged doors providing the maximum level of security. CE Marked door lock Fire rated to BS EN 1634-1:2000 & Performance rated to BS EN 12209. Latchbolt operated by lever handle from either side. Deadbolt operated by key from either side. Supplied with 2 keys, striker plate and fixing screws. Finishes stainless steel (SS) or satin brass (SB). Other finishes available. 1000 differs.

Operation

Latchbolt operated by lever handle from either side. Deadbolt operated by key from either side

Case

Hardened steel. Pierced to accept 38mm centre horizontally opposed bolt through fixing furniture

Striker Plate

Box, Type K

Latchbolt Brass, easily reversible. Projection 12mm

Deadbolt Brass, with two hardened steel rollers. Throw 20mm

Follower Brass, to suit 8mm square spindle. One-way action Heavier springing

available

Differs 1000 unnumbered

Rebate Units To Suit G3067-13mm G3068-19mm G3069-25mm


Fixing Forend fixing centres 130mm

A Lock Case

63mm, 76mm

B Backset 45mm, 57mm

C Centres 57mm, 57mm

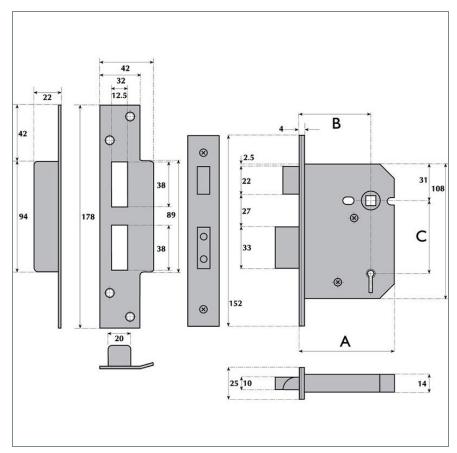

Midlands, WV13 1AL, United Kingdom.

+44(0)1902 635 964 | sales@imperiallocks.co.uk