

Heavy Duty Tubular Latch

HD26

Heavy Duty Tubular Latch



Application:

- Heavy duty tubular latch for doors hinged on the left or right
- Latch bolt withdrawn by the lever handle from either side
- Both 2.5" and 3" cases pierced to accept bolt through furniture
- Bolt through fixings allows a more secure, longstanding fixing of door furniture overtime when compared to handles fixed with woodscrews
- Suitable for sprung and light unsprung lever furniture, can also be used with knob furniture



Specification:

- Profiled beveled latch bolt for smooth and positive engagement during operation
- Two piece forend supplied with a dual finish in stainless steel and polished brass finish
- Double sprung allowing universal handing
- Available with radiused or square forend and strike
- Supplied with an adjustable formed strike complete with a splinter guard for a professional finish

- Reference: HD26
- Case Size: 2.5" (70mm) and 3" (82mm)
- Backset: 45mm and 57mm
- Case: Steel, galvanised
- Inner Forend: Steel, radius
- Outer Forend: Dual finish supplied with both Stainless steel and Polished Brass finish
- Striking Plate: Adjustable, dual finish supplied with both Stainless steel and Polished Brass finish
- Splinter Guard: Black plastic
- Latch Bolt: Zinc, brass appearance
- Follower: 8mm cast steel

Standards:

- Tested to BS EN 12209:2003

| | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| 2 | M | 4 | 1 | 0 | F | - | B | 0 | 2 | 0 |
|---|---|---|---|---|---|---|---|---|---|---|
- EN 1634-1 assessed for use on 30 and 60 minutes timber fire doors
- CE Marked: EC Certificate 0086-CPR-633283
- DoP: 101MLB which can be found at www.uniononline.co.uk/DoP
- In addition to EN12209 requirements HD Tubular Latches have been cycle tested for over 1 million cycles through the follower and slam tested on the latch
- 10 year guarantee

Finish:

- Dual finish supplied with both SS (Stainless Steel) and PB (Polished Brass finish)



Heavy Duty Tubular Latch


HD26

Heavy Duty Tubular Latch



ASSA ABLOY

Technical Design:

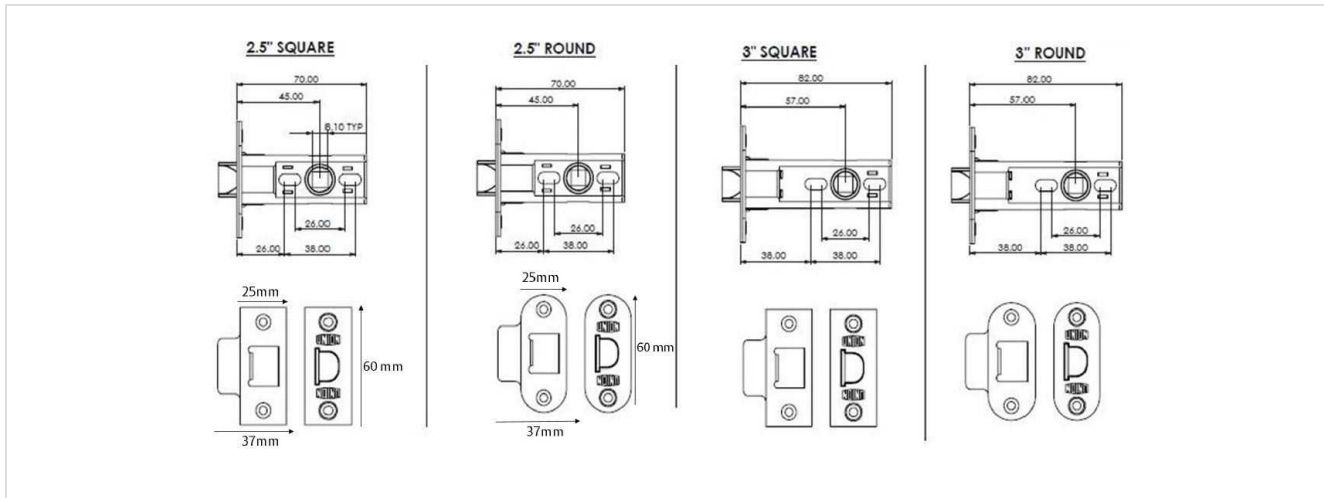

Variants:

| Code | Description |
|------------------|--|
| JHD26S-PB/SS-2.5 | HD TUB.LATCH, DUAL PB/SS, 2.5"CASE, SQR. F.END, |
| JHD26S-PB/SS-3.0 | HD TUB.LATCH, DUAL PB/SS, 3"CASE, SQR. F.END, |
| JHD26R-PB/SS-2.5 | HD TUB.LATCH, DUAL PB/SS, 2.5"CASE, RDS. F.END, |
| JHD26R-PB/SS-3.0 | HD TUB.LATCH, DUAL PB/SS, 3"CASE, RDS. F.END, |
| YHD26S-PB/SS-2.5 | HD TUB.LATCH, DUAL PB/SS, 2.5"CASE, SQR. F.END, VISI |
| YHD26S-PB/SS-3.0 | HD TUB.LATCH, DUAL PB/SS, 3"CASE, SQR. F.END, VISI |