

# StrongBOLT

2200

## BS 5 Lever Sashlock



### Application:

- For timber doors hinged on the left or right
- Suitable for doors up to 54mm thick

### Specification:

- Chamfered bolt design increases the performance of the lock under side load testing. The chamfer of the bolt also makes drilling attack more difficult
  - Anti-pick, anti-saw and anti-drill security features for resistance against attack
  - Radius inner forend for ease of installation
  - Can be installed in the many UK mortices without the need for additional carpentry or spoiling the edge of the door
  - Anti-pick and keyhole protection prevents forced entry by picking
  - Hardened steel pins provide resistance to attack from sawing
  - Deadbolt locked or unlocked by the key from either side
  - 20mm deadbolt for secure positive deadlocking and additional resistance against attack
  - 2200S can be keyed alike with 2100S
- 
- Case Size: 68mm (2.5") or 81mm (3")
  - Backset: 45mm or 57mm
  - Case: Steel, red powder coat
  - Forend: Stainless steel or brass
  - Striking Plate: Finished to match forend
  - Faceplate: Supplied with square faceplate which covers a radius inner forend
  - Deadbolt: Zinc with hardened steel rollers
  - Latch Bolt: Zinc
  - Follower: Sintered Steel
  - Rebate Kit: 2200REB 13mm (0.5")
  - Keying Groups: May be supplied to pass or differ. Supplied with 2 steel nickel plated keys
  - Key Blank Number: JKB SBOLT
  - Packaging: Individually boxed (supplied in outer boxes of 10) or Visipacked



### Standards:

- Tested to BS3621:2007


2	M	4	1	0	F	7	K	D	2	B
---	---	---	---	---	---	---	---	---	---	---



### Finish:

- SC - Satin Stainless Steel
- PL - Polished Brass finish

#### Technical Design:

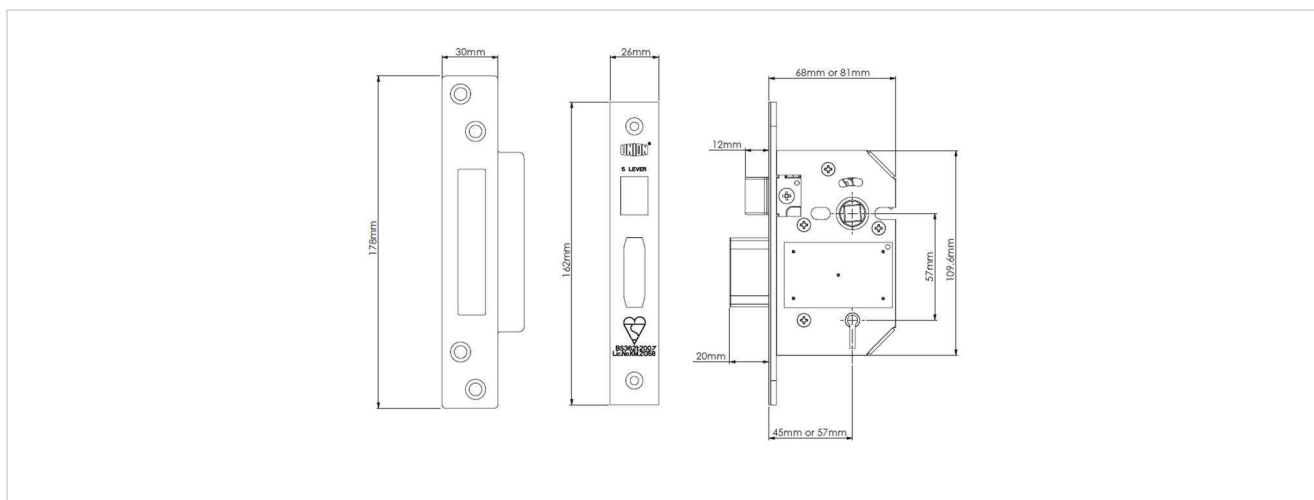

#### Variants:

Code	Description
J2200S-PL-2.5	S.BOLT BS5 LVR S.LOCK, PB FINISH, 2.5"CASE,
J2200S-PL-3.0	S.BOLT BS5 LVR S.LOCK, PB FINISH, 3"CASE,
J2200S-SC-2.5	S.BOLT BS5 LVR S.LOCK, SS/SC FINISH, 2.5"CASE,
J2200S-SC-3.0	S.BOLT BS5 LVR S.LOCK, SS/SC FINISH, 3"CASE,
Y2200S-PL-2.5	S.BOLT BS5 LVR S.LOCK, PB, 2.5"CASE, VISI
Y2200S-PL-3.0	S.BOLT BS5 LVR S.LOCK, PB, 3"CASE, VISI
Y2200S-SC-2.5	S.BOLT BS5 LVR S.LOCK, SS/SC , 2.5"CASE, VISI
Y2200S-SC-3.0	S.BOLT BS5 LVR S.LOCK, SS/SC , 3"CASE, VISI
JP2200S-PL-2.50	BS 5 LEV. S/LOCK SQ.FOREND(KA)
JP2200S-PL-3.00	BS 5 LEV. S/LOCK SQ.FOREND(KA)
JP2200S-SC-2.50	BS 5 LEV. S/LOCK SQ.FOREND(KA)
JP2200S-SC-3.00	BS 5 LEV. S/LOCK SQ.FOREND(KA)